

Pressure-Relief Cartridge Valve, Size 4

$Q_{max} = 30 \text{ l/min (7.5 gpm)}$ $p_{max} = 420 \text{ bar (6000 psi)}$
Seated design, direct acting, with mechanical operation
Series DDPC-1L...




- Compact construction for cavity type AL – 3/4-16 UNF
- High flow rates
- 7 pressure ranges available
- High-pressure damping ensures very stable operation
- Also suitable for anti-shock function (cross-line relief)
- Available with hand-knob or tamper-proof cap
- All exposed parts with zinc-nickel plating
- Can be fitted in a line-mounting body

1 Description

Series DDPC-1L... cartridges are screw-in pressure-relief valves, nominal size 4 mm. They are direct-acting seat valves. The mounting thread is the 3/4"-16 UNF pattern. The straightforward design delivers an outstanding price/performance ratio and good pressure drop - flow rate characteristics. In order to obtain a good pressure adjustment over the entire pressure range, the total pressure range is subdivided into 7 pressure stages. A pressure stage corresponds to a certain spring for a settable maximum operating pressure. The cartridges can be fitted in the AL cavity and also in some 3/4"-16 UNF cavities from other valve man-

ufacturers. The pressure is set by means of an adjusting screw or a hand-knob. To safeguard pressure settings, the adjusting screw can be sealed with a tamper-proof cap. These pressure-relief cartridges are used to limit the system pressure in mobile and industrial applications. All external parts of the cartridge are zinc-nickel plated to DIN 50 979 and are thus suitable for use in the harshest operating environments. If you intend to manufacture your own cavities or are designing a line-mounting installation, please refer to the section "Related data sheets".

2 Symbol



3 Technical data

General characteristics	Description, value, unit
Designation	pressure-relief cartridge valve
Design	seated design, direct acting, with mechanical operation
Mounting method	screw-in cartridge 3/4-16 UNF
Tightening torque	50 ± 10 % (35 ft-lbs ± 10 %)
Size	nominal size 4 cavity type AL to Bucher standard
Weight	0.19 kg (0.42 lbs)

General characteristics	Description, value, unit	
Mounting attitude	unrestricted	
Ambient temperature range	-25 °C ... +80 °C (-13 °F ... +176 °F)	
Hydraulic characteristics	Description, value, unit	
Maximum operating pressure - port 2 - port 1	420 bar 250 bar ¹⁾	(6000 psi) (3600 psi)
Maximum flow rate	30 l/min (7.5 gpm)	
Nominal pressure ranges	20 bar, 40 bar, 100 bar, 160 bar, 250 bar, 350 bar, 420 bar (285 psi, 570 psi, 1400 psi, 2300 psi, 3600 psi, 5000 psi, 6000 psi)	
Pressure adjustment range	1 turn \cong 80 bar (1150 psi) = p _N 420 bar (6000 psi) 1 turn \cong 70 bar (1000 psi) = p _N 350 bar (5000 psi) 1 turn \cong 51 bar (700 psi) = p _N 250 bar (3600 psi) 1 turn \cong 32 bar (455 psi) = p _N 160 bar (2300 psi) 1 turn \cong 21 bar (300 psi) = p _N 100 bar (1400 psi) 1 turn \cong 8 bar (120 psi) = p _N 40 bar (570 psi) 1 turn \cong 4 bar (60 psi) = p _N 20 bar (285 psi)	
Flow direction	2 → 1, see symbols	
Hydraulic fluid	HL and HLP mineral oil to DIN 51 524; for other fluids, please contact BUCHER	
Hydraulic fluid temperature range	-25 °C ... +80 °C (-13 °F ... +176 °F)	
Viscosity range	10...650 mm ² /s (cSt), recommended 15...250 mm ² /s (cSt)	
Minimum fluid cleanliness Cleanliness class to ISO 4406 : 1999	class 20/18/15	




ATTENTION!


¹⁾ Any residual- or surge-pressure in port 1 (tank pressure) is additive to the pressure setting in port 2.

4 Performance graphs measured with oil viscosity 33 mm²/s (cSt)


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
p_N = 420 bar (6000 psi)

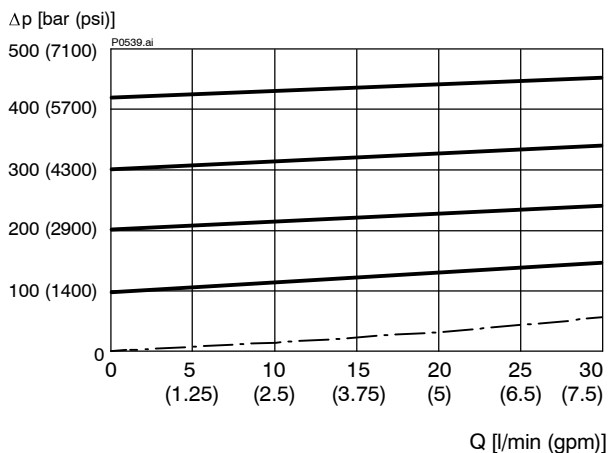


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
p_N = 350 bar (5000 psi)

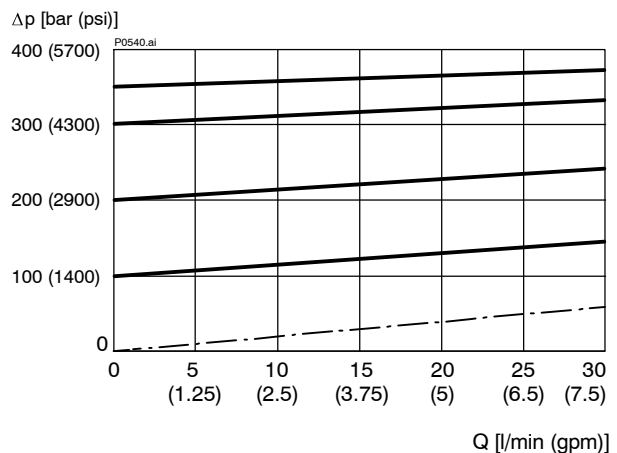


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
 $p_N = 250 \text{ bar (3600 psi)}$

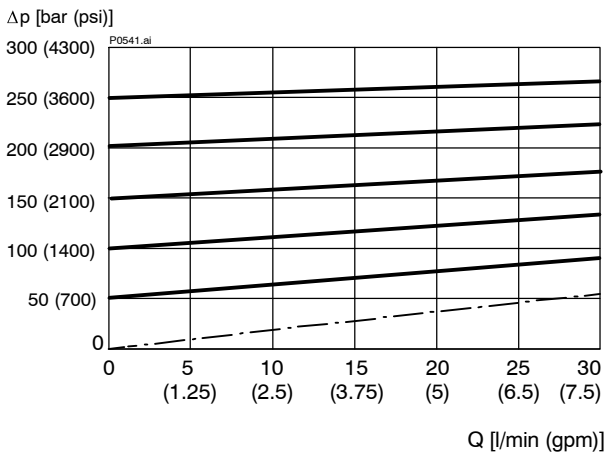


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
 $p_N = 160 \text{ bar (2300 psi)}$

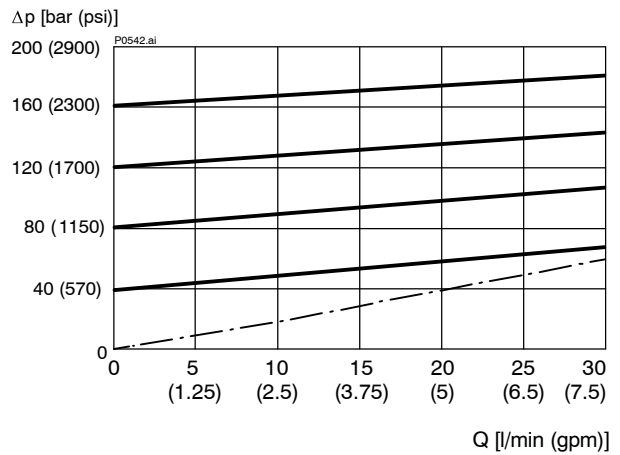


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
 $p_N = 100 \text{ bar (1400 psi)}$

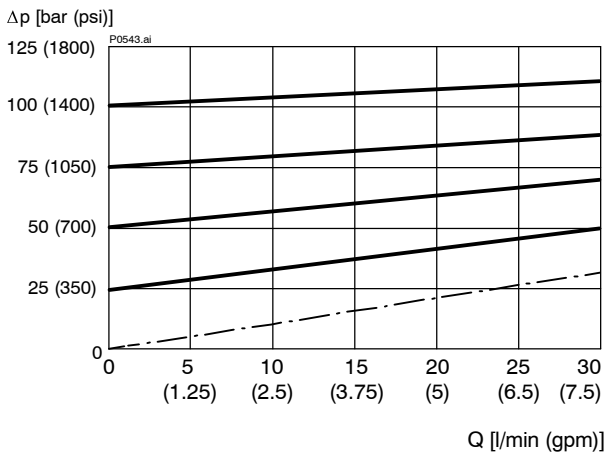

$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
 $p_N = 40 \text{ bar (570 psi)}$

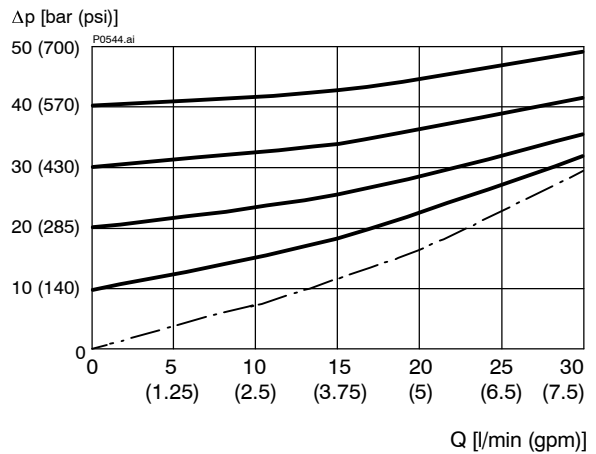


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
 $p_N = 20 \text{ bar (285 psi)}$

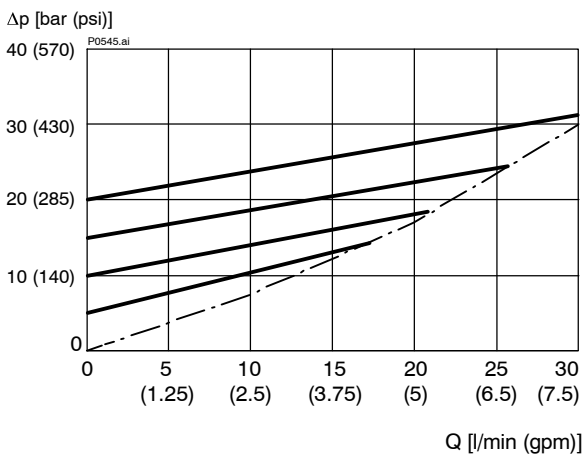


- - - - - $p_2 \text{ min.} = \text{application limit / minimum bypass pressure}$

5 Dimensions & sectional view

With adjusting screw "S"

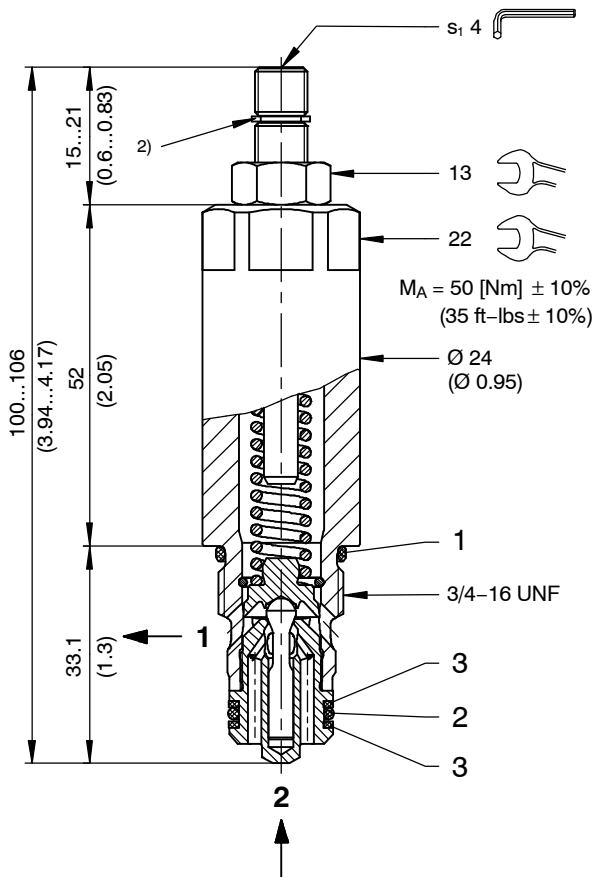

With hand-knob adjuster "H"

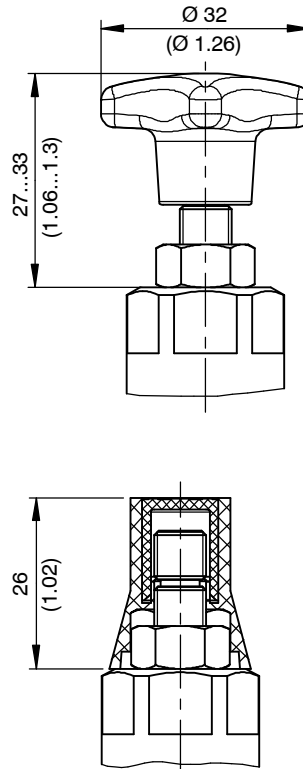

Adjusting screw with tamper-proof cap
(order separately in plain language)

6 Installation information



IMPORTANT!

When fitting the cartridges, use the specified tightening torque. Set the required pressure with the adjusting screw (s₁). After you have set the valve, lock the adjusting screw with the lock nut.



ATTENTION!

The DDPC-1L-4... cartridge is also suitable for anti-shock service (cross-line relief). Note, however, that the pressure at port 1 must not exceed 250 bar.



ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



IMPORTANT!

Valve settings can be sealed by fitting the tamper-proof cap. To fit the cap, the snap ring²⁾ has to be removed. Subsequent adjustment is only possible by destroying the tamper-proof cap.

Seal kit NBR no. DS-350-N³⁾


Item	Qty.	Description
1	1	O-ring no. 017 Ø 17,17 x 1,78 N90
2	1	O-ring no. 014 Ø 12,42 x 1,78 N90
3	2	Backup ring Ø 10,70 x 1,45 x 1,00 FI0751



IMPORTANT!

³⁾ Seal kit with FKM (Viton) seals, no. DS-350-V

7 Ordering code

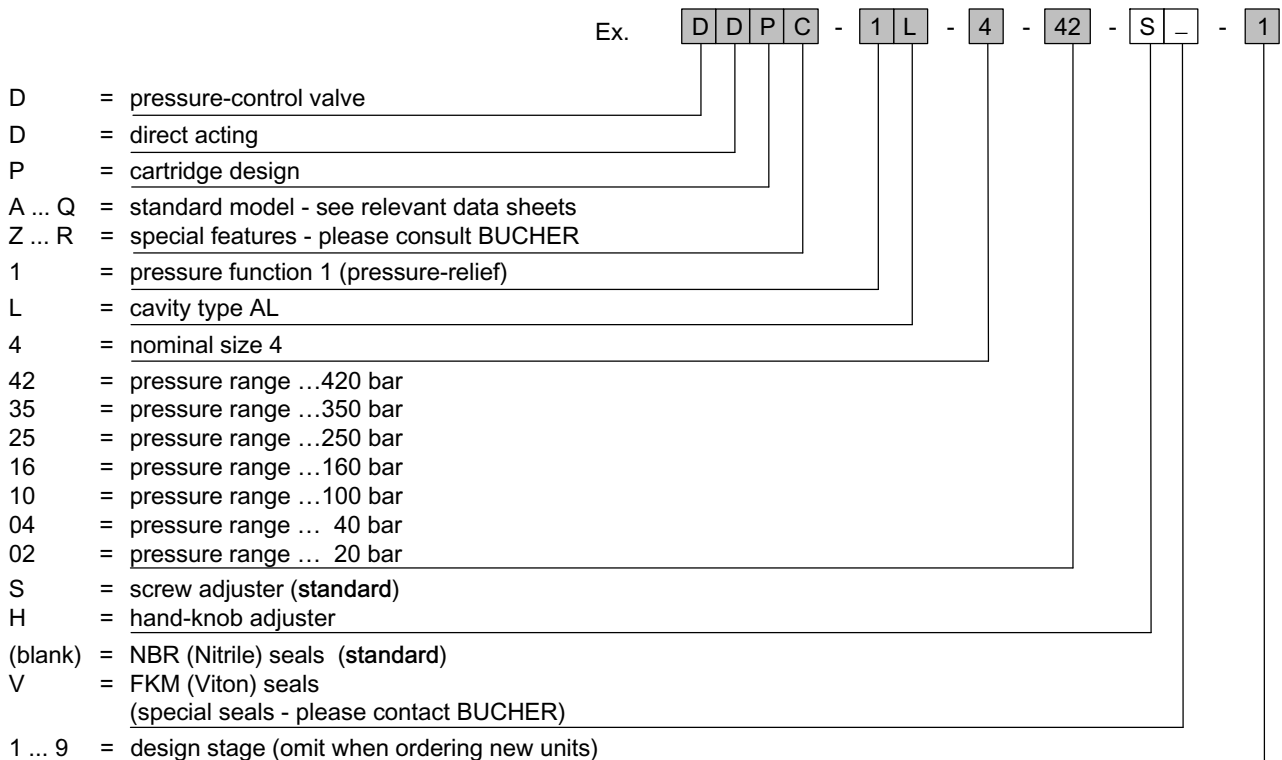

IMPORTANT!

When required, the tamper-proof cap (the adjustment seal) must be ordered separately in plain language.

8 Related data sheets

Reference	Description
400-P-040011	The form-tool hire programme
400-P-040171	Cavity type AL
400-P-720101	Line-mounting body, type GALA (G 3/8")

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2019 by Bucher Hydraulics AG Frutigen, CH-3714 Frutigen

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.305.300.305.305.355